





RMK Enterprises

Sourcing Precision. Delivering Trust.

Products



Adaptors




Boring Heads



Quick Change
Tapping Adaptor




Endmill



Drill



Cutting Tools



Collets



Nuts




Spanners



Drill Chuck



U Drills



Vice



Tooling Machinery
Accessories




Tungsten Carbide
Rotary Burrs



Testing Tools

Adaptors

BT Drill Chuck Adaptor

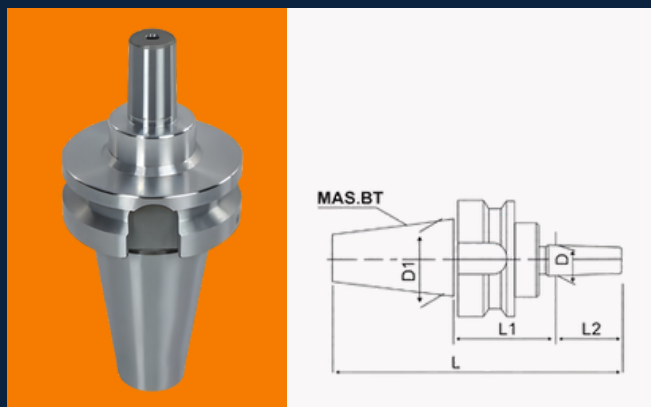

MODEL	L2	L	D	D1	M
BT30-JT6	22.225	101	14.199	41.75	M12
BT40-JT6	22.225	132.6	14.199	44.45	M16

MT Series Adaptor



SHA NK	ER 16	ER 20	ER 25	ER 32	ER 40	ER 50	FMB-22 /27/32	SLA-25 /32/40
MT-2	✓	✓	✓	✓		✓		
MT-3	✓	✓	✓	✓	✓		✓	✓
MT-4				✓	✓		✓	✓
MT-5					✓	✓		

Flange Type Adaptors



MODEL / RANGE
ER 32 - DIA 80mm
ER 40 - DIA 80mm


SDC Cylindrical Adaptor



Model	D	L
C 16 - SDC 6 - 150 L	16	150
C 20 - SDC6 - 200 L	20	200
C 16 - SDC 8 - 150 L	16	150
C 20 - SDC 8- 200 L	20	200

Adaptors

Cylindrical Collet Adaptor

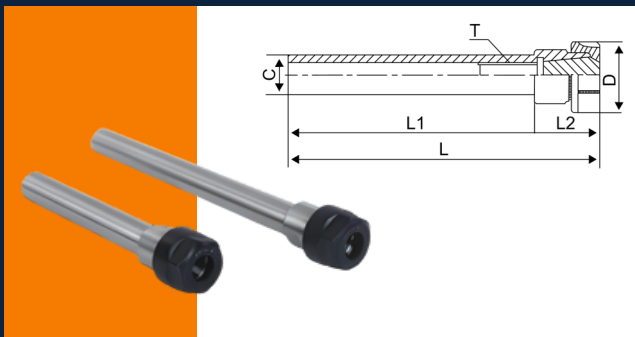

MODEL	L1	C	D
C10-ER8 A/M-100/150/200	100/150 /200	10	14/12
C10-ER11 A/M-100/150/200	100/150 /200	10	19/16
C12-ER11 A/M-100/150/200	100/150 /200	12	19/16
C12-ER16 A/M-100/150/200	100/150 /200	12	28/22
C16-ER11 A/M-100/150/200	100/150 /200	16	19/16
C16-ER16 A/M-100/150/200/250/300	100/15/ 200/250	16	28/22
C20-ER16 A/M- 100/150/200	100/150 /200	20	28/22

MODEL	L1	C	D
C20-ER25 UM-100	100	20	42
C25-ER16 A-100	100	20	28
C25-ER20 A-100	100	25	34
C25-ER25 UM-100/150/200/250	100/150/ 200/250	25	42
C25-ER32UM-100	100	25	50
C32-ER16 A-100	100	32	28
C32-ER20 A-100	100	32	34
C32-ER25UM-100	100	32	42
C32-ER32UM-100/150/200	100/150/200	32	50
C32-ER40UM-100	100		63
C40-ER16A-100	100		28
C40-ER20 A-100	100		34
C40-ER32UM-100	100	40	50
C40-ER40UM-100/150/200	100/150	40	63


ISO (NT) Series Adaptors



Model	
ISO (NT) 30 / 40 /50	
ER SERIES ADAPTORS	ER16, ER20, ER25, ER32, ER40, ER50
FACE MILL ADAPTORS	22, 27, 32, 40
MT REDUCTION ADAPTORS	MT-1, 2, 3
SIDE LOCK ADAPTORS	SLA- 20, 25, 32, 40
INTEGRATED KEYLESS ADAPTOR	APU-13 / 16
JT-6 ADAPTOR	JT-6


Adaptors

BT – MT (Reduction Socket) Adaptor

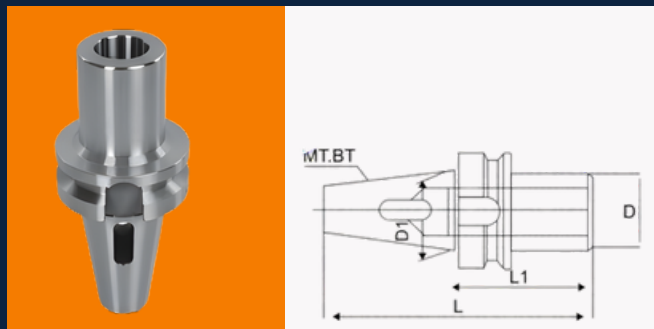

MODEL	L	D	D1
BT30-MT1-50	95	25	25
BT30-MT2-60	108.4	32	31.75
BT30-MT3-70	128.4	40	31.75
BT40-MT1-50	110.4	25	25
BT40-MT2-60	125.4	32	44.45
BT40-MT3-70	135.4	40	44.45
BT40-MT4-90	155.4	48	44.45
BT50-MT2-45	146.8	25	69.85
BT50-MT3-65	166.8	40	69.85
BT50-MT4-90	186.8	48	69.85
BT50-MT5-105	196.8	63	69.85


BT Series ER Collet Adaptor

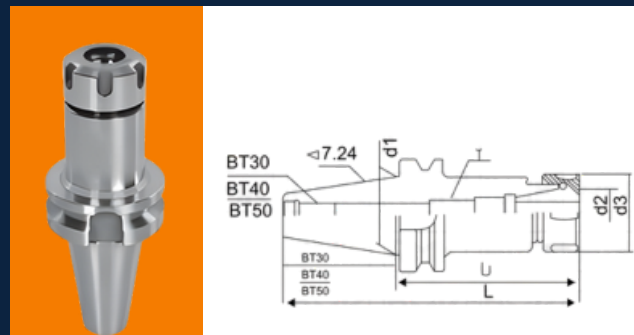

MODEL	L1	D3	D1
BT30-ER11 A/M-70/100	70/100	19/16	31.75
BT30-ER16 A/M-70/100	70/100	28/22	31.75
BT30-ER20A-70/100	70/100	34	31.75
BT30-ER25UM-70/100	70/100	42	31.75
BT30-ER32UM-70/100	70/100	50	31.75
BT30-ER40UM-80/100	80/100	63	31.75
BT40-ER11 A/M-70/100/150	70/100/150	19/16	44.25
BT40-ER16 A/M-70/100/150/200/250/300	70/100/150/200/250/300	28/22	44.25
BT40-ER20A-70/100/150/200/250/300	70/100/150/200/250/300	34	44.45
BT40-ER25UM-70/100/150/200/250/300	70/100/150/200/250/300	42	44.45
BT40-ER32UM-70/100/150/200/250/300	70/100/150/200/250/300	50	44.45
BT40-ER40UM-80/100/150/200/250/300	80/100/150/200/250/300	63	44.45
BT50-ER16 A-100/150/200/250/300	100/150/200/250/300	28	69.85
BT50-ER20 A-100/150/200/250/300	100/150/200/250/300	34	69.85
BT50-ER25UM -100/150/200/250/300	100/150/200/250/300	42	69.85
BT50-ER32UM-100/150/200/250/300	100/150/200/250/300	50	69.85
BT50-ER40UM-100/150/200/250/300	100/150/200/250/300	63	69.85
BT50-ER50UM-100/150	100/150	73	69.85


Adaptors

BT – Side Lock Adaptor

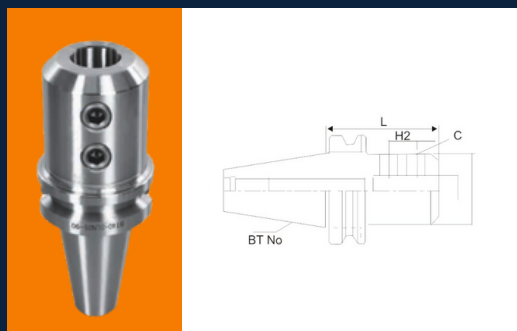

MODEL	L	C
BT30-SLA 16	65	50
BT30-SLA 20	70	52
BT30-SLA 25	75	65
BT30-SLA 32	90	72
BT40-SLA-10	65	45
BT40-SLA-12	70	45
BT40-SLA16	65	50
BT40-SLA 20	70	52
BT40-SLA 22	90	52
BT40-SLA 25	60/100/150/200	65
BT40-SLA 32	60/100/150/200	72
BT40-SLA 40	110/150/200	90
BT50-SLA 16	65	50
BT50-SLA 20	70	52
BT50-SLA 25	100/150/200	65
BT50-SLA 32	105/150/200	72
BT50-SLA 40	110/150/200	90
BT50-SLA 50	120	100


BT – Face / Shell / Mill Adaptor

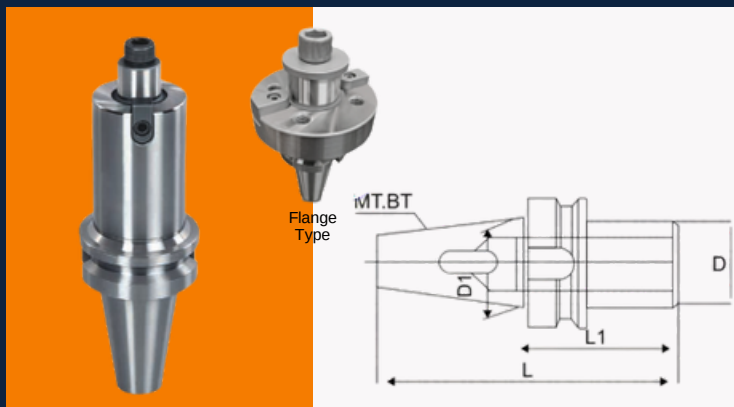

MODEL	L1	D	d
BT30-FMB22-45	45	50	22
BT30-FMB27-45	45	60	27
BT30-FMB32-60	60	78	32
BT40-FMB16-60/100/150/200	60/100/150/200	34	16
BT40-FMB22-60/100/150/200/	60/100/150/200/250/300/400	48	22
BT40-FMB27-60/100/150/200/	60/100/150/200/250/300/400	54	27
BT40-FMB32-60/100/150/200/250/300	60/100/150/200/250/300	78	32
BT40-FMB40-60/100/150/200/250/300	60/100/150/200/250/300	89	40
BT40-FMB40	FLANGE Type		
BT50-FMB16-100/150/200/250/300	100/150/200/250/300	34	16
BT50-FMB22-100/150/200/	60/100/150/200/250/300/400/500	50	22
BT50-FMB27-100/150/200/	60/100/150/200/250/300/400/500	60	27
BT50-FMB32-100/150/200/250/300	60/100/150/200/250/300	78	32
BT50-FMB40-100/150/200/250/300	100/150/200/250/300	98	40
BT50-FMB40	FLANGE Type		
BT50-FMB60	FLANGE Type		

Adaptors

BT – SDC Adaptor

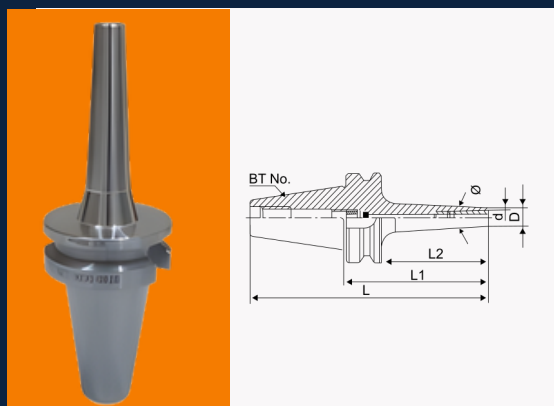

Model	L1	θ	D	d
BT40-SDC06-120/150	120/150 0	6°	14	3/6.
BT40-SDC08-120/150	120/150 0	6°	22	3/8.
BT40-SDC12-120/150	120/150 0	6°	34	3/12.
BT50-SDC06-120/150	120/150 0	6°	14	3/6.

R-8 (M1 TR) Adaptors



Model	
THREAD PITCH : 12 X 1.5 / M 12 / 7/16 UNF	
R-8 (M1 TR) COLLETS	3MM -20 MM
ER SERIES ADAPTORS	ER 16, ER20, ER25, ER32, ER40
FACE MILL ADAPTORS	22, 27, 32, 40
MORSE TAPER ADAPTOR	MT-2/3
DRILL CHUCK ADAPTORS	JT-6
KEY LESS CHUCK ADAPTORS	APU-13


BT Series Angle Heads (90°)



Model		MAX SPEED	MAX TORQUE	L	POWER
BT30/BT40/BT50	ER 16	4500 RPM	12 NM	60/120	1.5 kw
BT30/BT40/BT50	ER 20	4000 RPM	16 NM	50/110	2 kw
BT30/BT40/BT50	ER 25	4000 RPM	32 NM	50/110	3 kw
BT30/BT40/BT50	ER 32	3500 RPM	40 NM	60/130	4 kw
BT30/BT40/BT50	ER 40	3000 RPM	75 NM	70/150	6 kw

Adaptors


HSK Series Adaptor

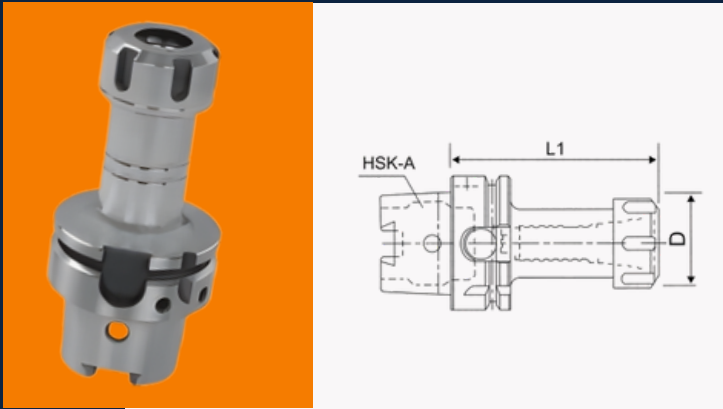

Model	D	L1
HSK 63A - ER25	42	80
HSK 63A - ER32	50	100
HSK 63A - ER40	63	100
HSK 63A - FMB22	48	50
HSK 63A - FMB27	58	60
HSK 63A - SLA25	90	65
HSK 63A - SLA32	100	72

Boring Heads

F1 Rough Boring Heads

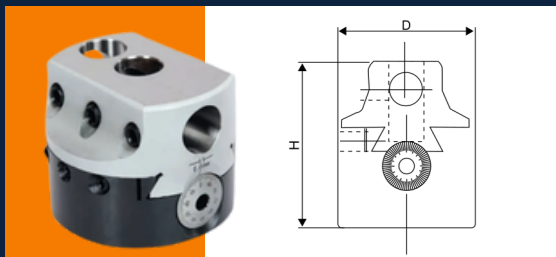


Model Number	D	H	Max Offset	BORING BARDIA	Min RADUATION	DIAL OF BORING
F1-12mm	50mm	63	16mm	12mm	0.01mm	10-125mm
F1-18	75mm	80	25mm	18mm	0.01mm	12-225mm
F1-25mm	100mm	88	41mm	25mm	0.01mm	15-630mm

Fine Boring Head Set BT40-Range 8-280mm (0.01mm)



F1 Rough Boring Heads Shanks

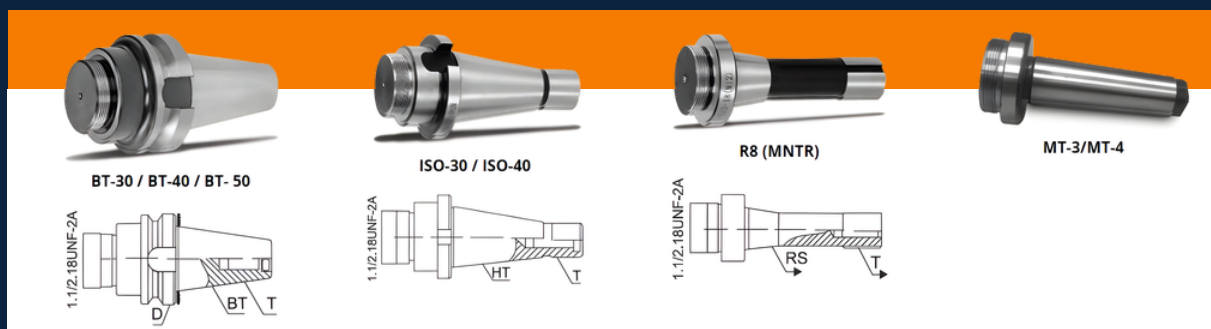

Model	T	L	THREAD
BT30/BT40/BT50	M16-2.0P	102	1.1/2"X18
NT (ISO)30	M12-1.75P	102	1.1/2"X18
NT (ISO) 40	M12/12X1.5/7/ 16-20UNF	135	1.1/2"X18
R8	M16-2.0P	132.50	1.1/2"X18
MT-3 /MT-4	M12/M16	120/150	1.1/2"X18

Boring Heads

Spare Shank for Fine Boring Head BT50/ISO50/ISO40



Model	Boring Range	Min Graduation	Max Offset	Weight
NBH2084	8-280MM	0.1 MM	28.0MM	3.0

Boring Cutter	Boring Range	DM	Insert	Bolt	Wrench	Weight
BJ2208-32	8-11	32	TBGT060102L	SB-1STR-M2	T6	0.095
BJ2010-40	10-13	40				0.095
BJ2012-53	12-17	53	TBGH090202L	SB-2STR-M2.5	T8	0.12
BJ2016-68	16-21	68				0.16
BJ2020-83	20-130	83	TPGH110302L	SB-3STR-M3	T8	0.22
BJ2025-96	25-135	96				0.34
BJ2030-115	30-140	115				0.54
BJ20-20	120-280	84+BT bar				0.23

Fine Boring Head Set BT40- Range 8-204mm (0.005mm)



Model	Accuracy	Boring Range	Adjustment Precision	Adjust the Stroke
NBH2084S	≤ 0.005MM	Ø8 - Ø280MM	Ø 0.005MM	Ø 30.00MM


BORING CUTTER	BORING RANGE	DM	INSERT	SCREW	WRENCH
SBJ 1608	8-38	32	TBGH 0601 L	M2	T-6
SBJ 1612	12-42	53	TBGH0902 L	M2.5	T-8
SBJ 1620	20-50	83	TBGH1103 L	M3	T-10
SBJ 1645	45-75	90	TBGH1103 L	M3	T-10
NO.1	74-103	-	TBGH1103 L	M2	T-6
NO.2	99-128	-	TBGH1103 L	M2	T-6
NO.3	124-153	-	TBGH1103 L	M2	T-6
NO.4	147-176	-	TBGH1103 L	M2	T-6
NO.5	172-203	-	TBGH1103 L	M2	T-6

Boring Heads

Spare Shank for Fine Boring Head BT 50/BBT - 40/ HSK 63 A TAPER



TWIN CUTTER - ROUGH BORING HEADS - TWN SERIES

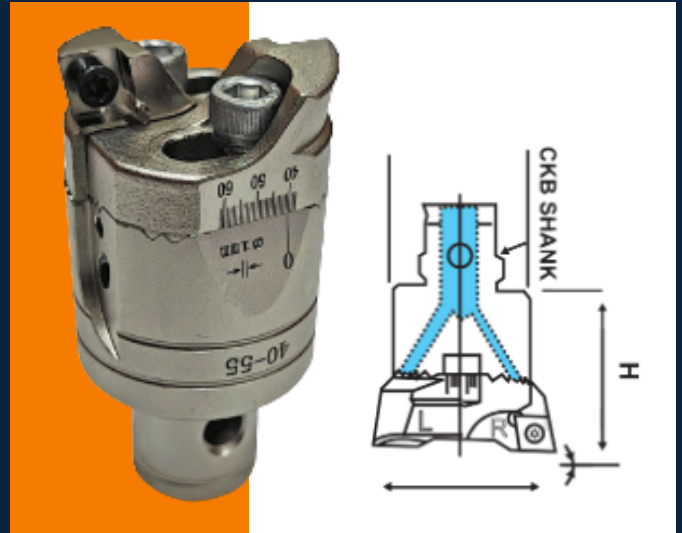


ADAPTORS FOR FINE BORING HEADS



MODEL / RANGE	H	INSERT
CKB-1 TWN 19MM-26 MM	30	CCMT06020
CKB-2 TWN 25MM-33MM	35	CCMT06020
CKB-3 TWN 32MM-42 MM	40	CCMT06020
CKB-4 TWN 40MM-55 MM	50	CCMT09T30
CKB-5 TWN 52MM-70 MM	60	CCMT09T30
CKB-6 TWN 68MM-92 MM	70	CCMT12040
CKB-6 TWN 90MM-122 MM	85	CCMT12040
BST -TWN 120MM-164MM	95	CCMT12040

MODEL / RANGE
BT 40 CKB 1 X 100 L
BT 40 CKB 1 X 130 L
BT 40 CKB 2 X 100 L
BT 40 CKB 2 X 165 L
BT 40 CKB 3 X 100 L
BT 40 CKB 3 X 165 L
BT 40 CKB 4 X 100 L
BT 40 CKB 4 X 150 L
BT 40 CKB 5 X 100 L
BT 40 CKB 5 X 150 L
BT 40 CKB 6 X 100 L
BT 40 CKB 6 X 150 L

CKB MICRO BORING HEADS FINE BORING EWN SERIES

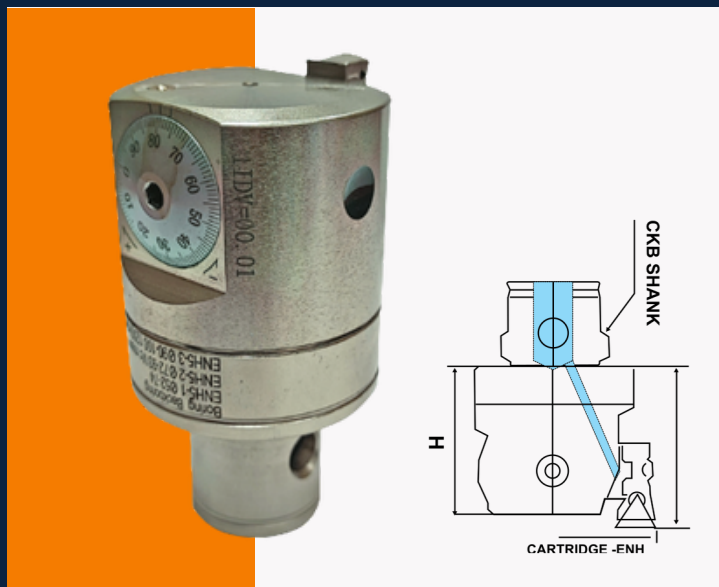


Model / Range	Cartridge	Internal Boring Range	Counter Boring Range	Insert	H (Height)
CKB-1, EWN 20MM-36MM	ENH1-1	20-26		TPGT-08	32
	ENH1-2	25-31	30-31		
	ENH1-3	30-36	30-36		
CKB-2, EWN 25 MM - 47 MM	ENH2-1	25-33			37
	ENH2-2	32-40	36-47		
	ENH2-3	39-47	39-47		
CKB-3, EWN 32 MM- 60 MM	ENH3-1	32-42			37
	ENH3-2	41-51	46-51		
	ENH3-3	50-60	50-60		
CKB-4, EWN 40MM-79MM	ENH4-1	41-54		TPGT-11	47
	ENH4-2	53-66	58-66		
	ENH4-3	61-74	61-74		
CKB-5, EWN 53MM-95MM	ENH5-1	53-70	62-70		56
	ENH5-2	68-85	69-85		
	ENH5-3	78-95	78-95		
CKB-6, EWN 68MM-150MM	ENH6-1	68-100	80-100		66
	ENH6-2	93-125	93-125		
	ENH6-3	125-150	125-150		
CKB-7, EWN 100MM-203MM	ENH7-1	100-153	112-153		66
	ENH7-2	125-178	125-178		
	ENH7-3	150-203	150-203		

Quick Change Tapping Adaptor

R8 (M1TR)-Gt-12: M3-M16



Cylindrical





MODEL	Range	D	d	L
Q25-GT12	M3-M16	Ø 25	Ø19	110
Q32-GT12	M3-M16	Ø 32	Ø19	110
Q40-GT12	M3-M16	Ø 40	Ø19	110
Q40-GT24	M5-M30	Ø 40	Ø30	130

BT Series



MODEL	Range	D	d	L
BT 30 GT12	M3-M16	31.75	19	110
BT40-GT12	M3-M16	44.45	19	110
BT40-GT24	M5-M30	44.45	30	130
BT50-GT12	M3-M16	69.85	19	110
BT50-GT24	M5-M30	69.85	30	130

MT Series

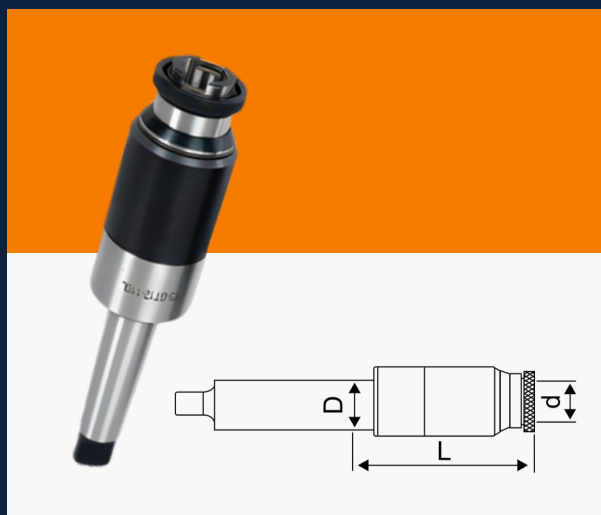

MODEL	Range	D	d	L
MT2-GT12	M3-M16	Ø17.780	Ø19	110
MT3-GT12	M3-M16	Ø23.825	Ø19	110
MT3-GT24	M5-M30	Ø23.825	Ø30	130
MT4-GT24	M5-M30	Ø31.267	Ø30	130


Synchro Tapping Adaptor



MODEL	Range
BT 40 ER 32	M3-M27

End Mill

Solid Carbide Endmill

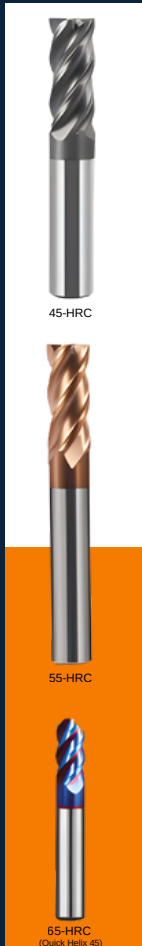

DIA	FL	OAL	SHANK
0.2	1	50	4
0.3	1	50	4
0.4	1	50	4
0.5	1	50	4
0.6	1.5	50	4
0.7	1.5	50	4
0.8	1.5	50	4
1	3	50	4
1.5	5	50	4
2	6	50	4/6
2.5	8	50	4
3	15	50	3/4/6
3.5	12	50	4
4	15	50	4/6
4.5	16	50	6
5	13	50	5/6
5.5	19	50	6
6	15	50	6
6.5	20	60	8
7	20	60	8
7.5	20	60	10
8	20	60	8
8.5	25	75	10
9	25	75	10
10	25	75	12
11	25	75	12
12	30	75	14
13	45	100	14
14	45	100	16
15	45	100	16
16	45	100	18
18	45	100	20
20	45	100	22
22	40	100	22
24	40	100	25
25	40	100	25

Solid Carbide Long Endmill



DIA	FL	OAL	SHANK
2	12	75	4
3	25	75	3
3	40	100	3
4	25	75	4
4	40	100	4
5	25	75	5
5	40	100	5
6	25	75	6
6	40	100	6
6	70	150	6
8	25	75	8
8	35	100	8
8	70	150	8
10	50	100	10
10	70	150	10
10	70	200	10
12	45	100	12
12	70	150	12
12	70	200	12
14	70	200	14
16	80	150	16
16	80	200	16
18	80	150	18
20	80	150	20
20	85	200	20
25	75	150	25

Long Neck Endmill 55 HRC : Flat/Ball



DIA	Neck L	FL	Shank	OAL
0.5	8	2	4	50
0.8	10	3	4	50
1	12/16/20	3	4	50
1.5	12/16/20	6	4	50
2	12/16/20	6	4	50
2.5	12/16/20	8	4	50
3	16/20	9	4	50

Roughing Endmill 55 HRC



DIA	FL	OAL	SHANK
4	12	50	4
5	13	50	5
6	15	50	6
8	20	63	8
10	25	70	10
12	25	75	12
16	45	100	16
20	45	100	20

End Mill

3 Fluted High Helix- Alluminium FLAT/ CORNER RADIUS)



PILOT DIA	BODY DIA	Total	Shank
3	10	50	3
4	12	50	4
5	15	50	5
6	18	50	6
8	24	60	8
10	30	70	10
12	35	75	12
14	45	100	14
16	45	100	16
20	45	100	20
6	30	100	6
8	35	100	8
10	40	100	10
12	45	100	12
16	80	150	16

Solid Carbide Corn Endmill

DIA	FL	Shank	OAL
6	25	6	50
6	32	6	60



Solid Carbide 2 Fluted Ball/ Flat Endmill

DIA	FL	OAL
4	20	50
5	20	50
6	20	50
8	25	60
6	30	100
8	35	100
10	40	100
12	45	100

Solid Carbide Single Fluted Endmill



DIA	FL	OAL
3	12	38
4	22	50
5	22	50
6	20	50
8	30	60



Carbide Taper Ball Nose Endmill (2 Fluted)

DIA	x	FL	x	OAL
2-6	x	25	x	50
3-6	x	25	x	50

End Mill

Thread Mill – 55 HRC



PITCH	FL	SHANK	OAL	FLUTE
METRIC				
5X0.8	10	4	50	3
6X1.0	12	6	60	3
8X1.25	16	6	60	3
10X1.5	20	8	60	3
12X1.75	30	10	75	4
16X2.0	30	12	75	4
20X2.5	40	16	100	4

PITCH	FL	SHANK	OAL	FLUTE
NPT				
1/16"X27	12	6	60	3
1/8"X27	12	6	60	3
1/4"X18	14	6	60	3
3/8"X18	20	10	75	4
1/2"X14	25	16	90	4

BSP				
1/16"X28	12	6	60	3
1/8"X28	12	8	60	3
1/4"X19	18	8	60	3
3/8"X19	15	10	75	4
1/2"X14	30	16	90	4
1"X11	35	16	90	4


HSS Single Fluted Endmill: M-42 Cobalt



DIA	Flute	Total Length	Shank
5	20	80	8
5	20	100	8
6	20	80	8
6	20	64	6
6	20	100	8
8	20	80	8
8	20	100	8
10	25	76	10
10	30	100	10

Drill

Solid Carbide Centre Drill

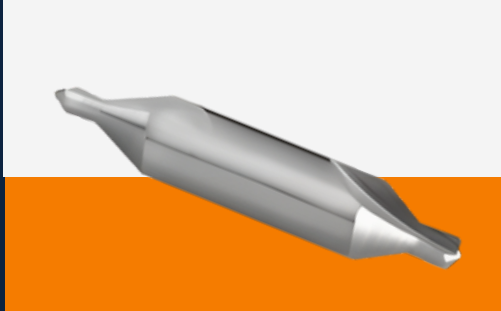

PILOT DIA	BODY DIA	TOTAL L
1	3.15	35
1.25	3	35
1.6	4	50
2	5	50
2.5	6.3	60
3.15	8	60
4	10	65
5	12.5	70
6.3	16	70

Solid Carbide Spot Drill : 60°/ 90°



DIA	Length
4 mm	50
6 mm	50
8 mm	60
10 mm	75
12 mm	75

Solid Carbide Drill



DIA	FL	OAL
0.8	12	34
0.9	12	34
1	12	34
1.1	18	40
1.2	18	40
1.3	18	40
1.4	18	40
1.5	18	40
1.6	18	40
1.8	18	40
2	24	49
2.1	30	57
2.2	30	57
2.3	30	57
2.4	30	57
2.5	30	57
2.6	35	65
2.7	35	65
2.8	35	65
2.9	35	65
3	35	65
3.1	35	65
3.2	35	65
3.3	35	65
3.4	35	65
3.5	35	65
3.6	35	65
3.7	35	65
3.8	35	65
4.0	35	65
4.1	40	75
4.2	40	75
4.3	40	75
4.4	40	75
4.5	40	75
4.6	40	75
4.7	40	75
4.8	40	75
4.9	40	75
5.0	40	75
5.1	40	75
5.2	40	75
5.3	40	75
5.4	40	75
5.5	40	75
5.6	40	75
5.7	40	75
5.8	40	75

DIA	FL	OAL
5.9	40	75
6.0	40	75
6.1	60	100
6.2	60	100
6.3	60	100
6.4	60	100
6.5	60	100
6.6	60	100
6.7	60	100
6.8	60	100
6.9	60	100
7.0	60	100
7.1	60	100
7.2	60	100
7.3	60	100
7.4	60	100
7.5	60	100
7.6	60	100
7.7	60	100
7.8	60	100
7.9	60	100
8.0	60	110
8.1	60	110
8.2	60	110
8.3	60	110
8.4	60	110
8.5	60	110
8.6	60	110
8.7	60	110
8.8	60	110
8.9	60	110
9.0	60	110
9.5	60	110
10.0	65	110
10.2	65	110
10.5	65	110
10.8	65	110
11.0	65	110
11.5	65	110
12.0	65	110
12.5	60	110
13.0	60	110
14.0	60	110
15.0	60	110
16.0	60	110
18.0	60	110
20.0	60	110

Drill

HSS Centre Drill (M2 / M35)




Dimension in (inch)					
SIZE	PILOT DIA	BODY DIA	Standard Length	Long Series	Extra Long Series
BS-1	3/64"	1/8"	1.1/2"	100MM	
BS-2	1/16"	3/16"	1.3/4"	100MM	
BS-3	3/32"	1/4"	2"	100MM	
BS-4	1/8"	5/16"	2.1/4"	100MM	150MM
BS-5	3/16"	7/16"	2.1/2"	100MM	150MM
BS-6	1/4"	5/8"	3"	100MM	150MM
BS-7	5/16"	3/4"	3.1/2"	100MM	150MM
Dimession in (mm)					
2X5	2	5.0	42	100MM	
2.5X6.3	2.5	6.3	47	100MM	
3.15X8	3.15	8.0	52	100MM	
4X10	4	10.0	59	100MM	150MM
5X125	5	13.0	66	100MM	150MM
6.3X16	6	16.0	74		
8X20	8	20.0	83		
10X25	10	25.0	103		

Through Coolant Drill (55 HRC)



DIA	Flute	OAL	Shank
8	40	80	8
8.2	40	80	10
8.5	40	80	10
9	40	80	10
9.5	40	80	10
10	55	80	10
10.2	55	105	12
10.5	55	105	12
11	55	105	12
11.5	55	105	12
12	55	105	12
12.5	65	105	14
13	65	105	14

Step Drill

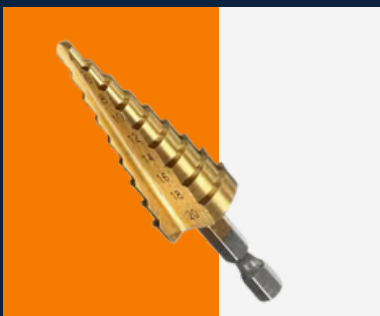

Size
4-22MM
4-32MM

HSS E Cobalt High Performance Drill



Dia in mm	Flute Length	Overall Length
1	12	34
1.5	18	40
1.60 (1/16")	20	43
1.8	22	46
2.00 (5/64")	24	49
2.1	24	49
2.2	27	53
2.3	27	53
2.4	30	57
2.5	30	57
2.6	30	57
2.7	33	61
2.78 (7/64")	33	61
2.8	33	61
2.9	33	61
3	33	61
3.1	36	65
3.20 (1/8")	36	65
3.3	36	65
3.4	39	70
3.5	39	70
3.60 (9/64")	39	70
3.7	39	70
3.8	43	75
3.9	43	75
4.00 (5/32")	43	75
4.1	43	75
4.2	43	75
4.3	47	80
4.37 (11/64")	47	80
4.4	47	80
4.5	47	80
4.6	47	80

Dia in mm	Flute Length	Overall Length
4.7	47	80
4.75 (3/16")	52	86
4.8	52	86
4.9	52	86
5	52	86
5.8	57	93
5.9	57	93
6.00 (15/64")	57	93
6.1	63	101
6.2	63	101
6.3	63	101
6.40 (1/4")	63	101
6.5	63	101
6.6	63	101
6.7	63	101
6.75 (17/64")	69	109
6.8	69	109
6.9	69	109
7	69	109
7.1	69	109
7.20 (9/32")	69	109
7.3	69	109
7.4	69	109
7.5	69	109
7.60 (19/64")	75	117
7.7	75	117
7.8	75	117
7.9	75	117
8.00 (5/16")	75	117
8.1	75	117
8.2	75	117
8.3	75	117
8.40 (21/64")	75	117

Dia in mm	Flute Length	Overall Length
8.5	75	117
8.6	81	125
8.7	81	125
8.75 (11/32")	81	125
8.8	81	125
8.9	81	125
9	81	125
9.10 (23/64")	81	125
9.2	81	125
9.3	81	125
9.3	81	125
9.4	81	125
9.5	81	125
9.60 (3/8")	87	133
9.7	87	133
9.8	87	133
9.9	87	133
10.00 (25/64")	87	133
10.2	87	133
10.25 (13/32")	87	133
10.5	87	133
10.8	94	142
11	94	142
11.10 (7/16")	94	142
11.50 (29/64")	94	142
12	101	151
12.5	101	151
12.70 (1/2")	101	151
13	101	151

Cutting Tools

Solid Carbide Threading Taps



Size	UNC
M 2 X 0.4	1/4"
M 2.5 X 0.45	
M 3 X 0.5	5/16"
M 4 X 0.7	3/8"
M 5 X 0.8	7/16"
M 6 X 1.0	1/2"
M 8 X 1.25	5/8"
M 10 X 1.5	
M 12 X 1.75	
M 14 X 2.0	
M 16 X 2.0	
M 20 X 2.5	

Solid Carbide T-Slot



DIA	Thickness	SHANK DIA	OAL	NECK DIA	NECK LIGHT
10	1/2/2.5	10	60	5	15
12	3/4	12	60	6	15
16	3/4/5	16	75	8	15

Solid Carbide Reamer



DIA	FL	OAL
2	25	50
2.5	25	50
3	25	60
4	25	60
5	25	60
6	25	60
7	30	75
8	30	75
10	30	75
12	30	75


Indexable Face Mill Cutters



DIA	BO RE	Z	INSERT		KEY	SCREW	KEY
			APMT	RPMT			
50	22	4	11/16.	1204	T-15	M 4 X 10	T-15
52	22	4		1204	T-15	M 4 X 10	T-15
63	22	5	1604	1204	T-15	M 4 X 10	T-15
80	27	6	1604	1204	T-15	M 4 X 10	T-15
100	32	6	1604	1204	T-15	M 4 X 10	T-15
125	40	6	1604	1204	T-15	M 4 X 10	T-15
160	40	9	1604	1204	T-15	M 4 X 10	T-15
200	60	12	1604	1204	T-15	M 4 X 10	T-15
250	60	12	1604	1204	T-15	M 4 X 10	T-15

Cutting Tools

Indexable Side and Face Cutters

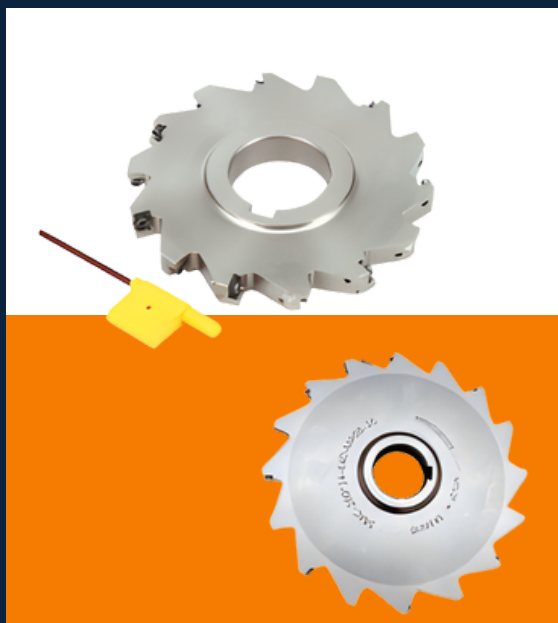

DIA	THICK	BORE	Z	Insert
100	8	32	14	MPHT060304
100	10	32	14	MPHT060304
125	10	40	14	MPHT060304
125	12	40	12	MPHT080305
125	16	40	10	MPHT080305
160	12	40	14	MPHT120408
160	16	40	12	MPHT120408
160	20	40	12	MPHT120408
200	16	40	14	MPHT120408
200	20	40	14	MPHT120408

Indexable End Mill Cutters

DIA	LENGT H	SH AN K	Z	INSERT				KEY
				AP MT	SCRE W	RP MT	SCRE W	
10	120	10	1	1135	M-2.5X6	-	-	T-8
12	130	12	1	1135	M-2.5X6	802	M-3X8	T-8
16	150/200	16	2	1135	M-2.5X6	802	M-3X8	T-8
20	150/200	20	2	1135	M-2.5X6	802	M-3X8	T-8
25	150/200 /250	25	2	1135	M-2.5X6	-	-	T-15
25	150/200 /250	25	2	1604	M-4X10	1003	M-3.5X8	T-15
32	200/250 /300	32	3	1604	M-4X10	1204	M-4X10	T-15
40	250/300	40	3	1604	M-4X10	1204	M-4X10	T-15



Indexable Counter Sink Tool 90°



RANGE	SHANK DIA	Z	INSERT
8-25MM	20MM	1	TCMT16
20-40 MM	20MM	2	TCMT16

Cutting Tools

Tap+Drill Combined (1/4" Hex Shank)



SIZE	DRILL DIA	TOTAL LENGTH
M 3	2.5	55
M 4	3.3	55
M 5	4.2	55
M 6	5	55
M 8	6.8	55
M 10	8.5	55

Shank Type Radius Cutter



RADIUS	DIA	SHANK	TOTAL LENGTH
R-2	10	10	60
R-3	12	12	60
R-4	14	12	65
R-5	16	12	65
R-6	20	16	70
R-8	24	20	80
R-10	28	25	85

HSS Centre Drill (M2 / M35)



Dimension in (Inch)					
SIZE	PILOT DIA	BODY	Standard	Long Series	Extra Long
BS-1	3/64"	1/8"	1.1/2"	100 MM	
BS-2	1/16"	3/16"	1.3/4"	100 MM	
BS-3	3/32"	1/4"	2"	100 MM	
BS-4	1/8"	5/16"	2.1/4"	100 MM	150 MM
BS-5	3/16"	7/16"	2.1/2"	100 MM	150 MM
BS-6	1/4"	5/8"	3"	100 MM	150 MM
BS-7	5/16"	3/4"	3.1/2"	100 MM	150 MM

Indexable Cutter : LNMU-03



Dia 50 Bore Z
MM 22 MM 7
63 MM 22 MM 8

DIA	LENGTH
16 MM	150/200 MM
20 MM	150/200 MM
25 MM	150/200 MM

Cutting Tools

Hss Counter Bore (Parallel Shank)



SIZE	PILOT DIA	CUTTER DIA	SHANK DIA	Length
3 MM	3.2	6	5	42
4 MM	3	4	4	60
5 MM	5.2	9	6	50
6 MM	6.2	11	10	60
8 MM	8.2	14	10	65
10 MM	10.3	17	12	75
12 MM	12.3	20	12	80

Counter Sink (3 Fluted) 90° Straight Shank



DIA	SHANK DIA	TOTAL LENGTH
8	6	50
10	6	50
12	8	56
16	10	60
20	10	65
25	10	70
31	12	70
40	12	90

Hand & Short Machine Taps



Hand Taps - METRIC/INCHES: Coarse and fine pitch	Spiral Point (SPPT): M2/HSS- CO	Spiral Fluted- HSS-CO	Roll Form TapS (For Aluminium) With Oil Groove	Tap Extractor (For removal of Broken TapS) M3-M30
---	--	-----------------------------	--	--


Annular Core Cutter



HSS E Cobalt Cutting Depth 50 mm	Carbide Tipped Cutting Depth 50 mm	Adaptor MT-2 / MT-3 (14- 60 mm)	Conversio n Shank Weldon to One Touch
--	--	--	--

Collets

ER Collets

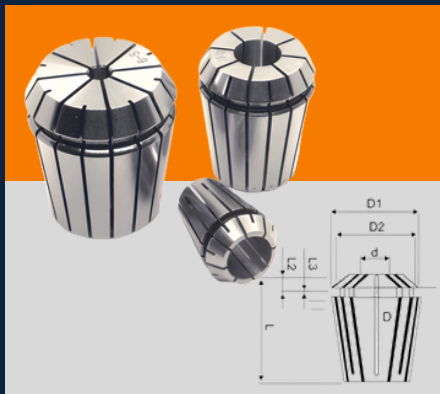

Model	d1 17	D	D	D2	L	L	L2	L3	Collapsible capacity
ER8	1.0–5.0	8	8.5	6.5	13.5	2.7	1.5	1.5	0.5
ER11	1.0–7.0	11	11.5	9.5	18.0	3.8	2.5	2.0	0.5
ER16	1.0–2.5	16	17	13.8	27.5	6.26	4.0	2.7	0.5
	2.5–10.0	16	17	13.8	27.5	6.26	4.0	2.7	1.0
ER20	1.0–13.0	20	21	17.4	31.5	6.36	4.8	2.8	1.0
ER25	1.0–16.0	25	26	22.0	34.0	6.66	5.0	3.1	1.0
ER32	1.0–25.0	32	33	29.2	40.0	7.16	5.5	3.6	1.0
ER40	2.0–32.0	40	26	22.0	34.0	6.66	5.0	3.1	1.0
ER50	10.00–40.00	20	21	17.4	31.5	6.36	4.8	2.8	1.0

SDC Collet



Model	RANGE	L	D
SDC 6	3-6MM	36	9.6
SDC 8	3-8MM	45	15
SDC 12	4-12MM	60	22

Straight Collets for Powermill Chuck



SIZE	Range	D	D2	L
C-20	3-16MM	20	25	52
C-32	6-25 MM	32	37	73

ERG Tap Collets



Model	D	D3	D4	L	L1	L3	L4	CAPACITY
ER16G	16.74	16	13.8	27.5	20.8	4	6.26	M3-M10
ER20G	20.74	20	17.4	31.5	23.9	4.8	6.36	M3-M17
ER25G	25.74	25	22	34	25.9	5.0	6.66	M3-M22
ER32G	32.74	32	29.2	40	31.8	5.5	7.16	M3-M27

Collets

Oil Seal Collets (Without Rubber Seal)



MODEL	D	D1	L	L1	RANGE
ER25	25.00	26	34	6.7	3 - 16 MM
ER32	32.00	33	40	7.2	3 - 20 MM

Tapping Collets, With Auto Clutch



Model		ISO SERIES			DIN	
		SIZE	SHANK	SQAURE	SHANK	SQAURE
GT12: (d=19, D=38, L=54) Range 3-16 mm	GT24: (d=30, D=58, L=79.5) Range 5-30 mm	M2	2.8	2.1		
		M3	3.15	2.5	3.5	2.5
		M4	4	3	4.5	3.4
		M5	5	4	6	4.9
		M6	6.3	5	6	4.9
		M8	8	6.3	8	6.3
		M10	10	8	10	8
		M12	9	7.1		
		M14	11.2	9		
		M16	12.5	10		
		M18	14	11.2	12	9
		M20	14	11.2		
		M22	16	12.5		
		M24	18	14		
		M27	20	16		
		M30	23	17		

Tapping Collets, Reducer



MODEL
GT24 to GT 12

Nuts

A Type (HEX) Nuts



Model	L	D	M
ER8A	11	14	M10 X 0.75
ER11A	11.3	19	M14 X 0.75P
ER16A	17.5	28	M22 X 1.5P
ER20A	19	34	M25 X 1.5P
ER25A	20	42	M32 x 1.5P

ER - M Nuts



Model	L	D	M
ER8M	10	12	10 X 0.75P
ER11M	12	16	M13 X 0.75P
ER16M	18	22	M19 X 1.0P
ER20M	19	28	M24 X 1.0P

ER - UM Nuts



Model	L	D	M
ER16UM	20	32	M20 X 1.5P
ER20UM	20	32	M24 X 1.5P
ER25UM	20	42	M32 X 1.5P
ER32UM	22.5	50	M40 X 1.5P
ER40UM	25.5	63	M50 X 1.5P
ER50UM	36	70	M64 X 2.0P

Spanners

ER (M) – Spanners



Model of Spanners	Type of nuts
ER8M	ER8M
ER11M	ER11M
ER16M	ER16M
ER20M	ER20M

ER (A / Hex) – Spanners



Model of Spanners	Type of nuts
ER8A	ER8A
ER11A	ER11A
ER16A	ER16A
ER20A	ER20A
ER25A	ER25A

ER (UM) – Spanners



Model of Spanners	Type of nuts
ER16	ER16UM
ER20	ER20UM
ER25	ER25UM
ER32	ER32UM
ER40	ER40UM
ER50	ER50UM

C – Spanners



Model of Spanners	Type of nuts
C-ER25	1/2" Light
C-ER32	1/2" Heavy
C-ER40	5/8", 3/4", Heavy
KEYLESS CHUCK	1/2" HEAVY


Drill Chuck

Keyless Drill Chuck



Model	Capacity	Taper	d	h	D	L	I
1/4"/6 MM	0.5-6MM	JT1	10	15	35	67	61
3/8"/10 MM	1-10MM	JT2	12	19	42	86	78
1/2"/13 MM	1-13MM	JT6	17.17	21	44	86	76
1/2"/13 MM	1-13MM	JT6	17.17	24	48	97	88
5/8"/16 MM	3-16MM	JT3	20.59	24	52	108	98
3/4"/20 MM	3-20MM	JT3	20.59	31	62	128	118

Integrated Keyless Drill Chuck

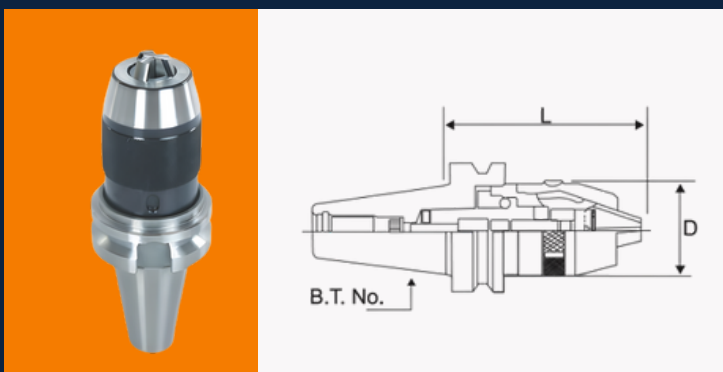


MODEL	Clamping Range	D	L	
			Min	Max
BT30-APU13	1-13MM	51.5	94	105
BT40-APU13	1-13MM	51.5	98	109
BT40-APU16	1-16MM	58	115	130
BT50-APU13	1-13MM	51.5	98	109
BT50-APU16	3-16MM	58	115	130

Key Type Drill Chuck



Size	Range	Taper
1/2"(13MM)	1-13 MM	JT-6
3/4"(20MM)	3-20 MM	JT-3
Stainless Steel	0-4 MM	JT-0

BT Power Milling Chucks

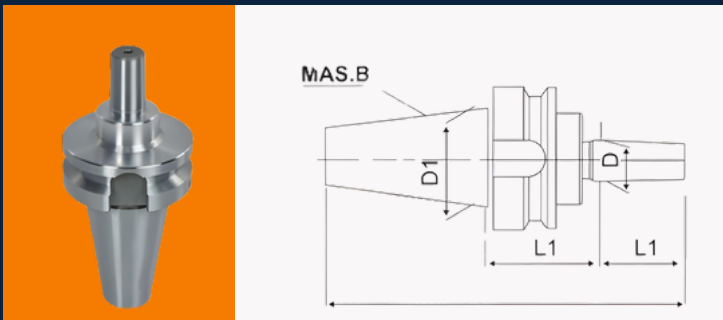

Model	L2	L	D	D1	M
BT30-JT6	22.225	101	14.199	41.75	M12
BT40-JT6	22.225	132.6	14.199	44.45	M16


U Drills



Cat No.	U DRILLS (D x 2) Size			U DRILLS (Dx3) Size	J DRILLS (Dx4) Size	Insert Clamp Screw Wrench		
	D	L	d					
SP 10-C20	10	20	20.0	30	20.0	-	20.0	SPMT 04 02 04
SP 10.5-C20	10.5	21		31.5		-		SPMg 05 02 04
SP 11.0-C20	11	22		33		-		
SP 11.5-C20	11.5	23		34.5		50.0		
SP 12.5-C20	12.5	25.0		37.5		52.0		
SP 13.0-C20	13.0	26.0		39.0		54.0		
SP 13.5-C20	13.5	27.0		40.5		56.0		
SP 14.0-C25	14.0	28.0		42.0		58.0		
SP 14.5-C25	14.5	29.0		43.5		60.0		
SP 15.0-C25	15.0	30.0		45.0		62.0		
SP 15.5-C25	15.5	31.0	25.0	46.5	25.0	64.0	25.0	SPMg 06 02 04
SP 16.0-C25	16.0	32.0		48.0		66.0		
SP 16.5-C25	16.5	33.0		49.5		68.0		
SP 17.0-C25	17.0	34.0		51.0		70.0		
SP 17.5-C25	17.5	35.0		52.5		72.0		
SP 18.0-C25	18.0	36.0		54.0		74.0		
SP 18.5-C25	18.5	37.0		55.5		76.0		
SP 19.0-C25	19.0	38.0		57.0		78.0		
SP 19.5-C25	19.5	39.0		58.5		80.0		
SP 20.0-C25	20.0	40.0		60.0		82.0		
SP 20.5-C25	20.5	41.0	32.0	61.5	32.0	84.0	32.0	SPMg 07 T3 08
SP 21.0-C32	21.0	42.0		63.0		86.0		
SP 21.5-C25	21.5	43.0		64.5		88.0		
SP 22.0-C25	22.0	44.0		66.0		90.0		
SP 22.5-C25	22.5	45.0		67.5		92.0		
SP 23.0-C25	23.0	46.0		69.0		94.0		
SP 23.5-C25	23.5	47.0		70.5		96.0		
SP 24.0-C25	24.0	48.0		72.0		98.0		
SP 24.5-C25	24.5	49.0		73.5		100.0		
SP 25.0-C32	25.0	50.0		75.0		102.0		
SP 25.5-C32	25.5	51.0	40.0	76.5	40.0	104.0	40.0	SPMg 09 04 08
SP 26.0-C32	26.0	52.0		78.0		106.0		
SP 26.5-C32	26.5	53.0		79.5		108.0		
SP 27.0-C32	27.0	54.0		81.0		110.0		
SP 27.5-C32	27.5	55.0		82.5		112.0		
SP 28.0-C32	28.0	56.0		84.0		114.0		
SP 28.5-C32	28.5	57.0		85.5		116.0		
SP 29.0-C32	29.0	58.0		87.0		118.0		
SP 29.5-C32	29.5	59.0		88.5		120.0		
SP 30.0-C32	30.0	60.0		90.0		122.0		
SP 30.5-C32	30.5		40.0	91.5	40.0	124.0	40.0	SPMg 11 04 08
SP 31.0-C32	31.0			93.0		126.0		
SP 31.5-C32	31.5			94.5		128.0		
SP 32.0-C32	32.0			96.0		130.0		
SP 32.5-C32	32.5			97.5		132.0		
SP 33.0-C32	33.0			99.0		134.0		
SP 33.5-C32	33.5			100.5		136.0		
SP 34.0-C32	34.0			102.0		140.0		
SP 35.0-C32	35.0			105.0		144.0		
SP 36.0-C32	36.0			108.0		148.0		
SP 37.0-C32	37.0		40.0	111.0	40.0	152.0	40.0	SPMg 14 05 12
SP 38.0-C32	38.0			114.0		156.0		
SP 39.0-C32	39.0			117.0		160.0		
SP 40.0-C32	40.0			120.0		164.0		
SP 41.0-C32	41.0			123.0		168.0		
SP 42.0-C32	42.0			126.0		172.0		
SP 43.0-C40	43.0			129.0		176.0		
SP 44.0-C40	44.0			132.0		180.0		
SP 45.0-C40	45.0			135.0		184.0		
SP 46.0-C40	46.0			138.0		188.0		
SP 47.0-C40	47.0		40.0	141.0	40.0	192.0	40.0	SPMg 09 04 08
SP 48.0-C40	48.0			144.0		196.0		
SP 49.0-C40	49.0			147.0		200.0		
SP 50.0-C40	50.0			150.0		206.0		
SP 52.0-C40	52.0			156.0		212.0		
SP 54.0-C40	54.0			162.0		215.0		
SP 55.0-C40	55.0							

Vices

Machine Vices

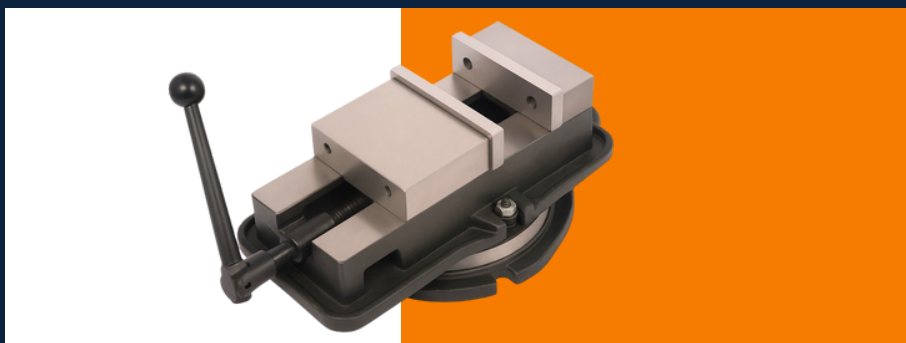

Jaw Width	Max Open	Jaw Height	Weight
6"	160MM	45	34KG
6"	200MM	50	46KG
6" Swivel Base	160MM	45	37KG
6" Swivel Base	200MM	50	51KG

Hydraulic Vice



Jaw Width	Opening	H	Max Clamp Force	Weight
6"	200MM	48	4500 KGF	45KG
6"	300MM	52	4500 KGF	60KG

Precision Self Centring 5 Axis Vice



Jaw Width	L	D	M
75	100	40	2500 kg
75	150	70	2500 kg
126	126	60	2500 kg

Precision Modular Vice




Jaw Width	L	D	M
ER8M	10	12	10 X 0.75P
ER11M	12	16	M13 X 0.75P
ER16M	18	22	M19 X 1.0P
ER20M	19	28	M24 X 1.0P

Tooling Machinery Accessories

Pull Studs – Regular / Through Coolant



MODEL	L	L1	L2	D	D1	D2	H	H1	M	θ		
BT30 (θ)	43	23	18	12.5	7	11	5	2.5	M12	45	60	90
BT40 (θ)	60	35	28	17	100	15	6	3	M16	45	60	90
BT50 (θ)	85	45	35	25	17	23	10	5	M24	45	60	90



CNC Tooling Trolleys




MODEL	
BT40/ BT50/ HSK 63	35 SLOTS

Clamping Kits



Kit Includes	Model	Table Slot	Stud Sizes
24 PC: STUDS	M10	12	10-1.5P
6 PC : T-NUTS	M12	14	12-1.75P
4 PC : COUPLING NUTS	M14	16	14-2.0P
6 PC : FLANGE NUTS	M16	18	16-2.0P
6 PC : STEP CLAMPS	M18	20	18-2.5P
12PC : STEP BLOCKS	M20	22	20-2.5P

Tool Holder Tray

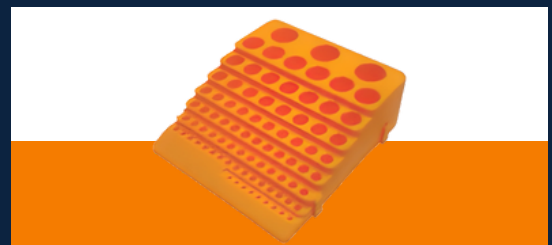

Suitable to hold Endmills / Drills / Collets, etc.	
Model	DIA
62 holes	6 - 42 MM

CNC Spindle Cleaner



BT 30 / BT 40 / BT 50

HSK 63 / HSK 100

CNC Scrap Cleaner Fan



Works as a fan to dust off burrs from the machine bed within seconds.

Tool Holder (Locking) Device



BT Series

HSK Series

Universal Type
Extra heavy
duty

MODEL
BT-30 / 40 / 50
HSK - 50 / 63 / 100
UNIVERSAL TYPE (BT, SK, CAT, NT - 40, HSK 63)

Electric (Servo) Tapping Machine



Tapping Range	M3- M16	M5 -M 30
Tapping Collet	GT -12	GT - 24
Input Volatge	220 V/ 50HZ	220 V /50HZ
Rated Power	600 W	1200 W
Working Radius	1045 mm	1180 mm
Max Speed	375 RPM	200 RPM
Dimension	70 X 66 X 22 CM	81 X 77 X 22 CM
Weight	31 KG	53 KG

Tapping Table



SIZE	M3- M16	M5 -M 30
Dimension	80 x 50 x 75 cm	90 x 60 x 80 cm
Weight	70 kg	90 kg
Material	Cast Iron	
Table Top	Grinding Finish	

Magnetic Clamp (For Onsite Tapping)



SIZE	M3- M16	M5 -M 30
Force	300 KGS	1000 KGS

Pneumatic Hand Champfering Machine



IDLE SPEED	INSERT	CAPACITY	APERAPURE
30000 RPM	TCMT08	C0.1- C1.5	>7mm

Endmill Grinding Machine (Carbide Endmill Only)



RATE/ PC	4-14 MM	3-20 MM
SPARE WHEEL	5,200.00	5,200.00
POINT ANGLE	90° - 140°	95° - 145°
POWER	AC, 220V	AC, 220V
MOTOR	120W / 4800RPM	180W / 4800RPM
DIMENSION (CMS)	35X23X24	35X23X24
WEIGHT	15 KG	16 KG

Drill Grinding Machine (Suitable For Hss, Carbide Both)



RANGE	3-14 MM	3-20 MM
SPARE WHEEL	5,000.00	6,000.00

POINT ANGLE	90° - 140°	95° - 145°
POWER	AC, 220V	AC, 220V
MOTOR	120W / 4800RPM	180W / 4800RPM
DIMENSION (CMS)	36X21X19	43X22X21
WEIGHT	9 KG	14 KG

Tungsten Carbide Rotary Burrs

Cylindrical



STANDARD Cut	CROSS/DIAMOND CUT	HEAD DIA	EDGE LENGTH	SHANK DIA
C-1	C-1 D	4	14	6
C-2	C-2 D	6	15	6
C-3	C-3 D	8	19	6
C-4	C-4 D	10	20	6
C-5	C-5 D	12	20	66
C-6	C-6 D	16	25	6
MC-1		3	15	3

Tree Radius



STANDARD CUT	CROSS/DIAMOND CUT	HEAD DIA	EDGE LENGTH	SHANK DIA
TB-1	TB-1 D	6	15	6
TB-2	TB-2 D	10	20	6
TB-3	TB-3 D	12	25	6

Tree Pointed




STANDARD CUT	CROSS/DIAMOND CUT	HEAD DIA	EDGE LENGTH	SHANK DIA
T-1	T-1 D	6	20	6
T-2	T-2 D	10	20	6
T-3	T-3 D	12	25	6
T-4	T-4 D	16	30	6
MT-1	MT-1 D	3	15	3

Cylindrical End Cut



STANDARD Cut	CROSS/DIAMOND CUT	HEAD DIA	Edge Length	SHANK DIA
CE-3	CE-3 D	8	19	6
CE -4	CE -4 D	10	20	6
CE-5	CE-5 D	12	20	6

Cylindrical Ball

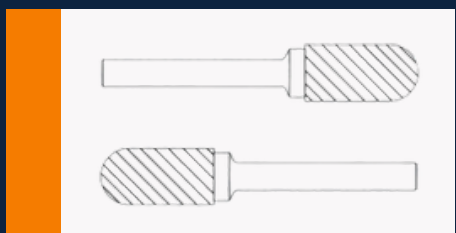

STANDARD	CROSS /	HEAD	EDGE	SHANK
B-1	B-1 D	6	15	6
B-2	B-2 D	8	20	6
B-3	B-3 D	10	20	6
B-4	B-4 D	12	20	6
B-5	B-5 D	16	25	6
MB-1	-	3	15	3


Flame



STANDARD CUT	CROSS/DIAMOND CUT	HEAD DIA	EDGE LENGTH	SHANK DIA
F-4	F-4D	12	24	6


Tungsten Carbide Rotary Burrs

Ball

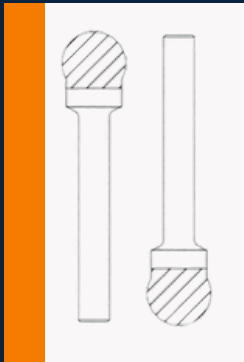

STANDARD	CROSS/DIAMOND CUT	HEAD DIA	SHANK DIA
S-1	S-1 D	6	6
S-2	S-2 D	8	6
S-3	S-3 D	10	6
S-4	S-4 D	12	6

Cone Shape Radius

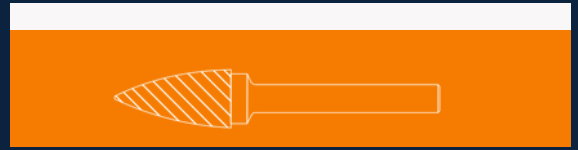

STANDARD CUT	CROSS/DIAMOND CUT	HEAD DIA	EDGE LENGTH	SHANK DIA
K-1	K-1 D	10	20	6
K-2	K-2 D	12	20	6
K-3		16	16	40
MK-1		3	10	3

Conical



STANDARD CUT	CROSS/DIAMOND CUT	HEAD DIA	EDGE LENGTH	SHANK DIA
A-1	A-1 D	6	20	6
A-2	A-2 D	10	20	6
A-3	A-3 D	12	25	6
A-4	A-4 D	10	10	6
A-5	A-5D	16	13	6
A-6	A-6D	16	12	6
MA-1	MA-1D	3	10	3

Rim Shape

STANDARD CUT	CROSS/DIAMOND CUT	HEAD DIA	EDGE LENGTH	SHANK DIA
R-2		19	6	6
R-3		13	10	6

Oval Shape

STANDARD CUT	CROSS/DIAMOND CUT	HEAD DIA	EDGE LENGTH	SHANK DIA
O-2		13	20	6
O-3		16	25	6


Testing Tools

3D-Taster /3D Edge Finder



AXIS	SHANK DIA	ACCURACY	STYLUS
X, Y, Z	20 MM	0.01MM	33MM L X 4 MM DIA

Centering Indicator

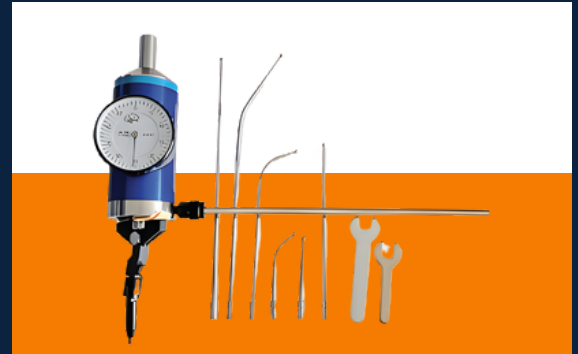

Range	ACCURACY
0-3 MM	0.01MM

Master Mandrel (Spindle Tester)



RANGE
BT40 DIA 40mm - 300mm Long
BT50 DIA 50mm - 300mm Long

Mechanical Edge Finders (Steel/Ceramic/Tin Coated)



MODEL	D(mm)	L1
4MM	4	90
10MM	10	83

Z - Axis Scale Zero Setters with Magnetic base



Model	Gross Attitude
DIAL TYPE (0.01MM)	50MM
DIGITAL (0.001 MM) IP 65 SERIES	50MM

Optical Edge Finders with Sound & Light



MODEL	D(mm)	L(mm)	D(mm)	Wt.
ES-20	20	160	10	0.28



Get in Touch

📞 +91 86696 61521

✉️ sales.rmKent@gmail.com

🌐 www.rmKenterprises.in



Scan QR Code to place enquiry on WhatsApp



RMK Enterprises

Plot No. BG 83, Shop No. 10, Landewadi,
Bhosari, Pune - 411026.